

## MICROWAVE GENERATOR


**TYPE: WMG60K-915**

### FEATURES:

- Continuously power control
- High efficiency
- Stability 0,1%
- Ripple <3%
- Frequency 915 MHz;  
(also available for 896/922MHz)

### SPECIFICATIONS:

- HF-Power output 60KW  
adjustable from 10-100%
- Power supply : 3-phase 400V / 50/60Hz
- Interlock:
  - 2 off safety interlock lines provided for external use
  - 2 off internal safety interlock lines
- Cooling : internally air cooled;  
and watercooled >40l/min; 6bar

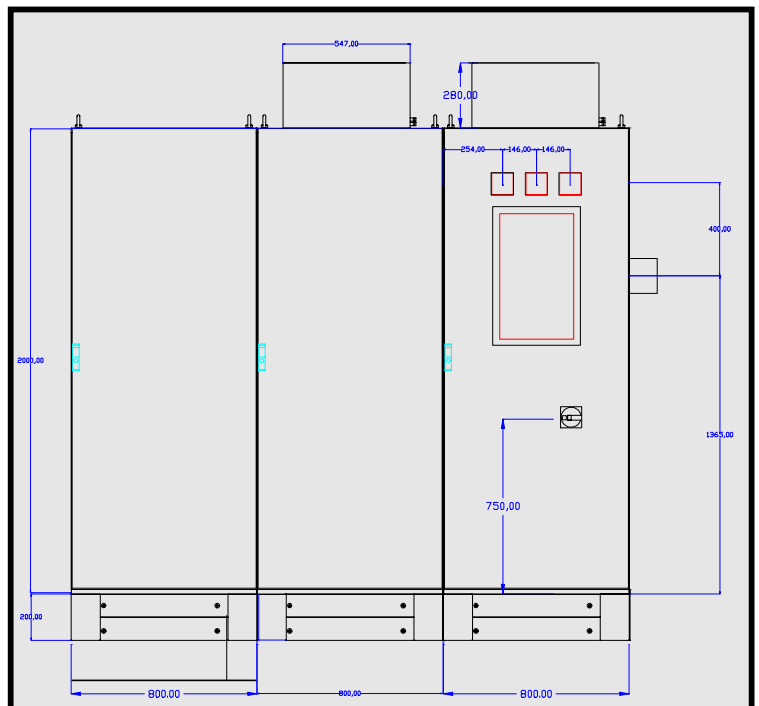

### Assembly:

- Rittal switch cabinet 3xPS4808.600 IP54  
(Color: RAL 7032)  
Dimensions: w.=2400mm; h.= 2000mm; d.= 800mm  
Socket height= 200mm

### Operation:

- Operating and Display Panel built-in front door
- Interface CAN-Bus

### Options:

- Interface PLC; RS232; Profibus;
- available for all supply voltages