


LowRipple Magnetron PowerSupply

TYPE: WMP300-SP

FEATURES:

- Continuous power control
- Low Ripple < 1% peak-to-peak
- Pulse able up to 25 kHz
- High efficiency
- For magnetron head 300W
/ 2450MHz

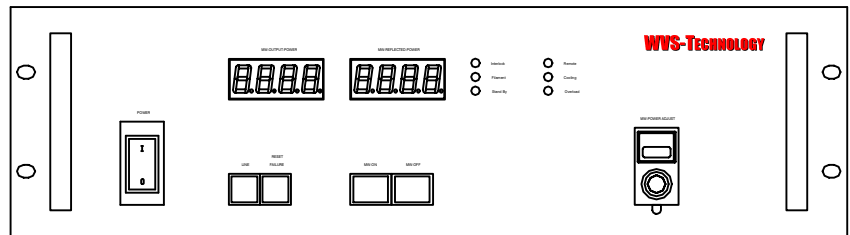

SPECIFICATIONS:


- Power : 300 W max.
- Cooling : Air
- Interface : 24VDC / 0...10V
- Dimensions: 19" ; 3U ;
depth 460mm

AVAILABLE:

300-3000W in 19" rack

OPTIONS:

- Interface - 4..20mA
- 0...10V
- CAN
- DeviceNet
- RS232

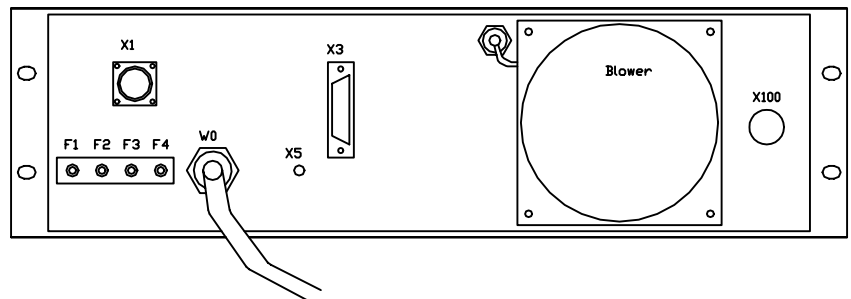

Connections:

- X1: external safety interlocks
- X3: interface / remote control
- X5: PE-Bolt protective earth
- X100: HT-Output Lemosha
- W0: mains cable